

Technical Data Sheet
 Edition 2, 2005
 Identification no.
 02 07 03 07 001 0 000008
 Version no. 0010
Bitumen Impregnated Boards


Bitumen Impregnated Boards

Expansion Joint Filler

Description	A preformed expansion joint filler board for joint in all concrete structures and brick structures. It is manufactured from high grade slow growing scandinavian wood fibers which are bitumen impregnated and compounded into a compressible non extruding board.
Uses	<ul style="list-style-type: none"> ■ For joint filler board in concrete highways, paving curbs, gutter and floors
Advantages	<ul style="list-style-type: none"> ■ Withstand repeated cycles of expansion and compression without extruding ■ Recovery to min. 75% thickness after compression ■ Virtually unaffected by temperature changes ■ Low moisture absorption ■ Durable and easy to handle
Sizes	Standard sheet sizes : 2.1. x 1.2 m Standard thickness : 10 mm 12 mm 19 mm 25 mm
Instructions for Use	
Application	Expansion Joint Filler is installed against existing concrete at columns and against adjacent structures or flat work before the placement of the subsequent concrete. For floors, paving and runways it is install 1 cm below the elevation of the concrete surface when the joints is to be filled later to the surface elevation with a proper sealant.
Site Handling	Should be stored on a flat sound surface. Can be cut to size on site with a sharp knife or any normal hand and circular saw.



Table of contents

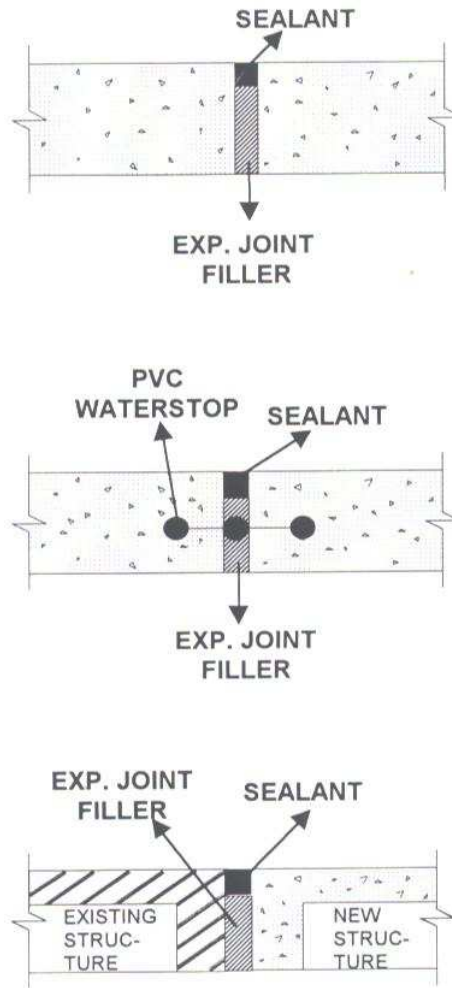

Legal Notes

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the product when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.



PT. Sika Indonesia
 Jl. Raya Cibinong- Bekasi km. 20
 Limusunggal- Cileungsi
 BOGOR 16820 - Indonesia
 Tel. +62 21 8230025
 Fax +62 21 8230026
 Website : www.sika.co.id
 e-mail: sikacare@id.sika.com

Branches
 Surabaya :
 Puri Niaga Blok G No. 29, Jl. Raya Rungkut Menanggal 11, Surabaya
 Tel : 031-8690202 ; Fax : 031-8682123
 Medan :
 Jl. Pancing / Jl. Willem Iskandar No.75 & 75 A, Kec. Medan Tembung
 Tel : 061- 6619500; Fax : (061) 6619400
 Batam :
 Jl. Laksamana Bintan, Komp. Bumi Riau Makmur Blok E No.3, Sungai Panas
 Tel : (0778) 424928; Fax : (0778) 450189

