

Sikasil® FS-665 SL

Self-levelling Fire-rated Sealant

Technical Product Data

Chemical base	1-C silicone	
Colour (CQP ¹ 001-1)	Black, White	
Cure mechanism	Moisture-curing	
Cure type	Neutral	
Density (uncured) (CQP 006-4)	1.48 kg/l approx.	
Non-sag properties (CQP 061-4 / ISO 7390)	Self-levelling	
Application temperature	5 - 40°C (40 - 105°F)	
Skin time ² (CQP 019-2)	50 min approx.	
Tack-free time ² (CQP 019-1)	240 min approx.	
Curing speed (CQP 049-1)	See diagram 1	
Shore A-hardness (CQP 023-1 / ISO 868)	15 approx.	
Tensile strength (CQP 036-1 / ISO 37)	0.6 N/mm ² approx.	
Elongation at break (CQP 036-1 / ISO 37)	600% approx.	
100% modulus (CQP 036-1 / ISO 37)	0.2 N/mm ² approx.	
Movement accommodation capability (ASTM C 719)	+100 / -50%	
Thermal resistance (CQP 513-1)	4 hours 1 hour	180°C (355°F) approx.
Short term		200°C (390°F) approx. 220°C (430°F) approx.
Service temperature	-40 - 150°C approx. (-40 - 300°F)	
Shelf life (storage below 25°C) (CQP 016-1)	12 months	

¹⁾ CQP = Corporate Quality Procedure

²⁾ 23°C (73°F) / 50% r.h.

Description

Sikasil® FS-665 SL is a fire-rated, self-levelling, low-modulus, silicone sealant with excellent adhesion to a wide range of porous and non-porous substrates.

Sikasil® FS-665 SL is manufactured in accordance with ISO 9001 quality assurance system and the responsible care program.

Product Benefits

- Fire rated: EN 11925-2 / DIN 4102-B1; up to 4 hours insulation and integrity (BS 476, part 20)
- Meets requirements of ISO 11600 25 LM F & G, ASTM C 920
- Outstanding UV and weathering resistance

Areas of Application

Sikasil® FS-665 SL can be used in horizontal joints between curtain wall facades and floor slabs to prevent spreading of fire and smoke. It is also suitable in other industrial applications where good UV, thermal and fire resistance are required.

This product is suitable for professional experienced users only. Tests with actual substrates and conditions have to be performed to ensure adhesion and material compatibility.



Table of Contents

Cure Mechanism

Sikasil® FS-665 SL cures by reaction with atmospheric moisture. The reaction thus starts at the surface and proceeds to the core of the joint. The curing speed depends on the relative humidity and the temperature (see diagram 1 below). Heating above 50°C to speed-up the vulcanization is not advisable as it may lead to bubble formation. At low temperatures the water content of the air is lower and the curing reaction proceeds more slowly.

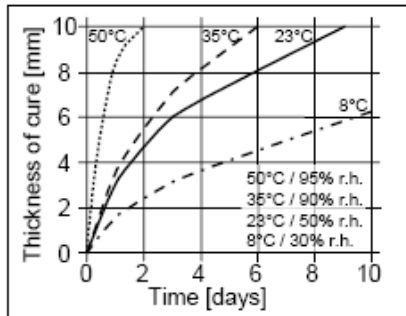


Diagram 1: Curing speed 1C-Sikasil®

Application Limits

Most Sikasil® WS, FS, SG, IG, WT, AS and other engineering silicone sealants manufactured by Sika are compatible with each other and with SikaGlaze® IG sealants. For specific information regarding compatibility between various Sikasil® and SikaGlaze® products please contact the Technical Service Department of Sika Industry.

All other sealants have to be approved by Sika before usage. Where two or more different reactive sealants are used, allow the first to cure completely before applying the next.

The compatibility of gaskets, backer rods and other accessory materials with Sikasil® FS-665 SL must be tested in advance.

Joints deeper than 15 mm should be avoided.

The above information is offered for general guidance only. Advice on specific applications will be given on request.

Method of Application

Surface preparation

Surfaces must be clean, dry and free from oil, grease and dust.

Advice on specific applications and surface pre-treatment methods is available from the Technical Service Department of Sika Industry.

Application

After suitable joint and substrate preparation, the sealant is gunned or poured into place. Joints must be properly dimensioned as changes are no longer possible after construction. For optimum performance the joint width should be designed according to the movement capability of the sealant based on the actual expected movement. The achievable fire rating depends on the joint dimensions as well. For backfilling various materials have been evaluated including fibre boards and mineral wool. For more information please contact the Technical Service Department of Sika Industry.

Tooling and finishing

Since the product is flowable, tooling is usually not necessary. Finishing must be carried out within the skin time of the product.

Removal

Uncured Sikasil® FS-665 SL may be removed from tools and equipment with Sika® Remover-208 or an-other suitable solvent. Once cured, the material can only be removed mechanically.

Hands and exposed skin should be washed immediately using Sika® Handclean Towel or a suitable industrial hand cleaner and water. Do not use solvents!

Overpainting

Sikasil® FS-665 SL cannot be overpainted.

Further Information

Copies of the following publications are available on request:

- Material Safety Data Sheet
- Application Guideline

Packaging Information

Cartridge	300 ml
Pail	25 kg

Value Bases

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

Health and Safety Information

For information and advice regarding transportation, handling, storage and disposal of chemical products, users shall refer to the actual Material Safety Data Sheets containing physical, ecological, toxicological and other safety-related data.

Legal Notes

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

PT. Sika Indonesia
Jl. Raya Cibinong- Bekasi km. 20
Limusunggal- Cileungsi
BOGOR 16820 - Indonesia
Tel. +62 21 8230025
Fax +62 21 8230025
Website : www.sika.co.id
e-mail: sikacare@id.sika.com

Branches
Surabaya :
Puri Niaga Blok G No. 29, Jl. Raya Rungkut Menanggal 11, Surabaya
Tel : 031-8690202 ; Fax : 031-8682123
Medan :
Jl. Pancing / Jl. Willem Iskandar No.75 & 75 A, Kec. Medan Tembung
Tel : 061- 6619500; Fax : (061) 6619400
Batam :
Jl. Laksamana Bintan, Komp. Bumi Riau Makmur Blok E No.3, Sungai Panas
Tel : (0778) 424928; Fax : (0778) 450189

